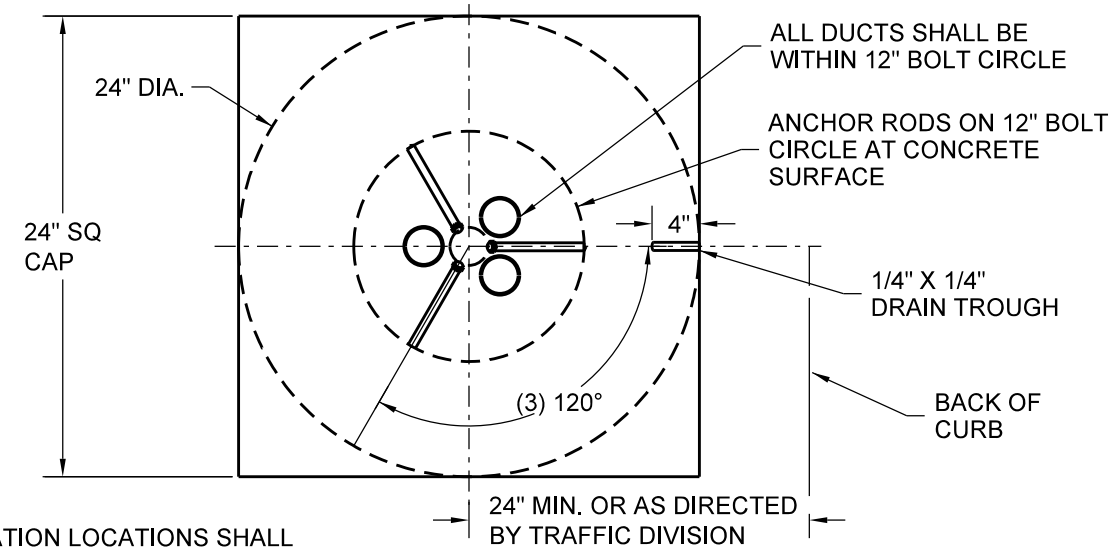

NOTES:

1. ALL FOUNDATION LOCATIONS SHALL BE DETERMINED IN FIELD BY TRAFFIC DIVISION AT TIME OF CONSTRUCTION.
2. FOUNDATION TOP SHALL HAVE SQUARE EDGES AND BE FINISHED ON ALL SIDES.

1 3" FROM HIGHPOINT OF FINISHED SIDEWALK GRADE, 4" FROM HIGHPOINT OF FINISHED BOULEVARD GRADE.

2 PROVIDE PROTECTIVE BUSHINGS ON ALL CONDUITS.

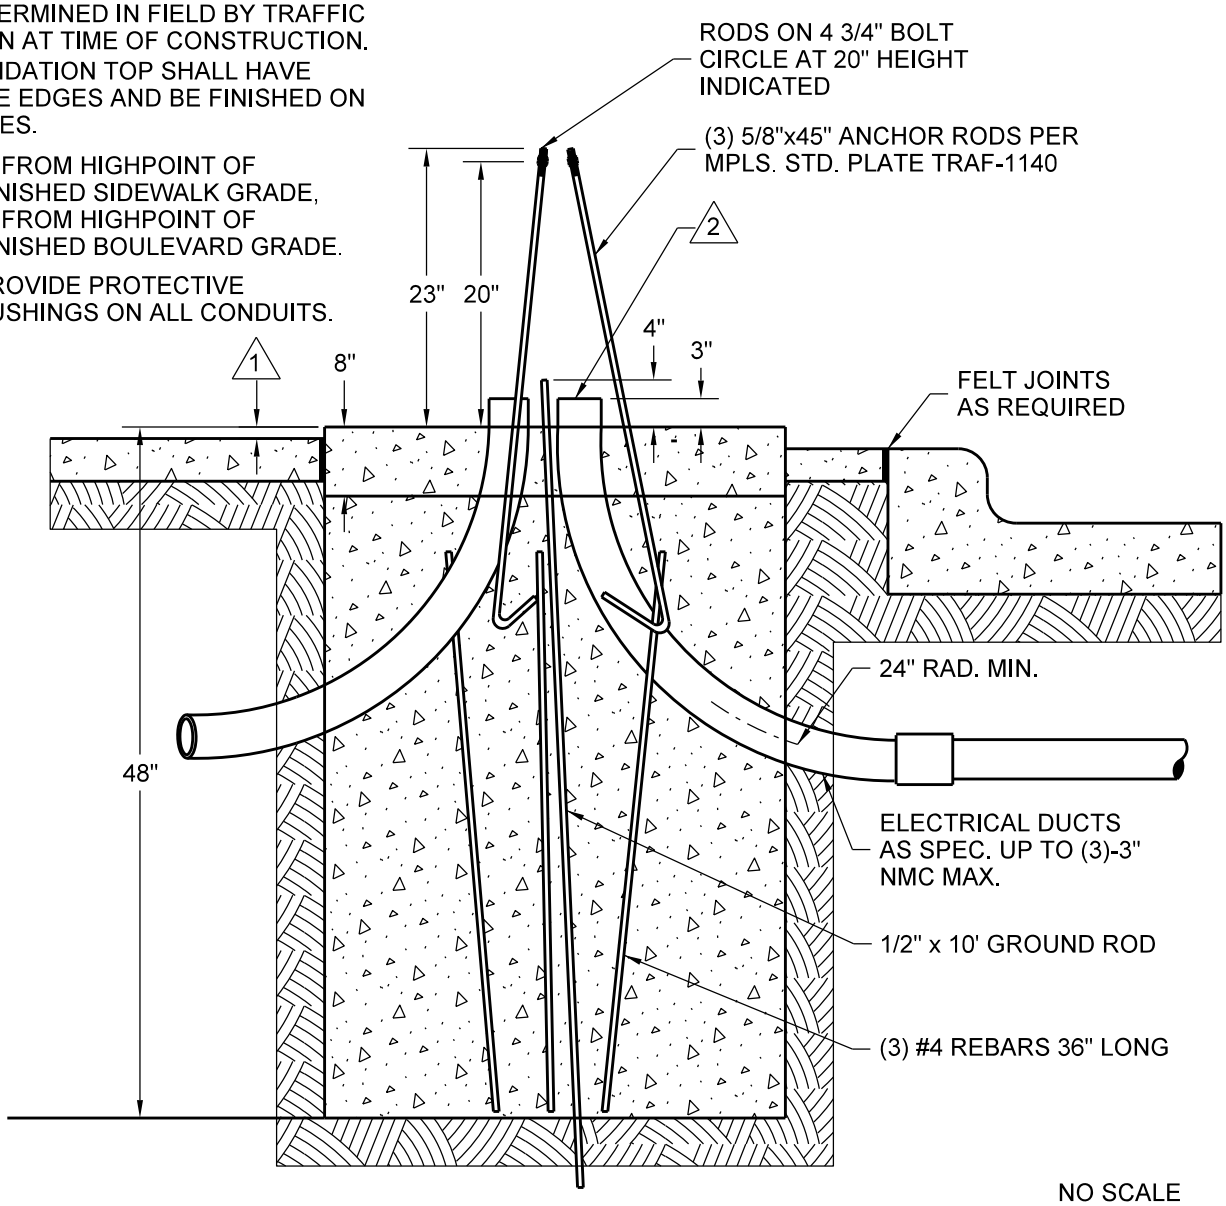

NO SCALE

MINNEAPOLIS DEPARTMENT OF PUBLIC WORKS		FOUNDATION - SIGNAL PEDESTAL REFERENCE PLATE: TRAF-1140	STANDARD PLATE NO. TRAF-1076-R1
DRAWN: CLK	DATE: 9/10/12		
APPROVED: DRP	DATE: 9/10/12		